




Technical Data Sheet

Torem Decking

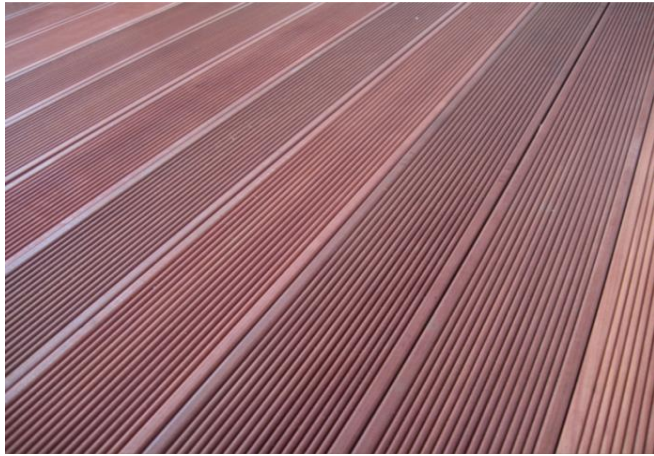

UNFINISH

Top : Reeded
Bottom : Smooth

Top : Smooth
Bottom : Smooth

Thickness	Species	Janka Hardness (N)	Brinell Hardness (KN)
approx 19.0 and 25.0 mm thickness is solid sawn timber	Torem (<i>Manilkara kanosiensis</i>)	13923	5.7

Dimension 19 Thickness x 90 Width x 1800-5700 mm Length
 19 Thickness x 140 Width x 1800-5700 mm Length

Dimensional Tolerances

Thickness Tolerance ± 0.2 mm
 Length Tolerance +10 mm/-0 mm
 Width Tolerance ± 0.3 mm
 Cupping Tolerance ≤ 1.0 mm from width
 Spring Tolerance ≤ 12 mm from length (for length 1800-2400 mm)
 ≤ 25 mm from length (for length 2700-3600 mm)
 ≤ 45 mm from length (for length 3900-4800 mm)
 ≤ 55 mm from length (for length 5400-5700 mm)

Density kg/m3 about 1070

Thermal conductivity 0.22 W/mK

Areal thermal resistance 0.086 m²K/W

Packaging Details: Using band strapping

19 Thickness x 90 Width x 1800-5700 mm Length

	M	per Pack	per Pallet
Board(s)	pc(s)	5	-
Bundle(s)	pc(s)	1	-

19 Thickness x 140 Width x 1800-5700 mm Length

	M	per Pack	per Pallet
Board(s)	pc(s)	2	-
Bundle(s)	pc(s)	1	-

Finishing Oil Neutral
 The Oil Neutral brand is from Bona, Sweden.

Installation Method : Refer to Kroya Technical Brochure

Maintenance and care Instruction: Refer to Kroya Technical Brochure

Profile Type : decking profile



Top : Reeded
Bottom : Smooth
FD 625 : Width 90 mm
FD 626 : Width 140 mm



Top : Smooth
Bottom : Smooth
E4ER3 : Width 90 mm
E4ER3 : Width 140 mm



Top : Reeded
Bottom : Smooth
FD 512 a : Width 90 mm
FD 512 a : Width 140 mm

Website: www.kroyafloors.co.id